


RI 型磁芯 (CORE RI TYPE)

用途：汽车音响调节器。

APPLICATIONS: CAR-RADIO TUNER.

ORDERING CODE:

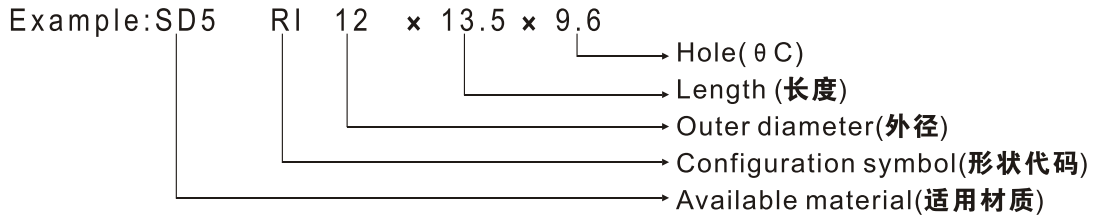

CONFIGURATIONS:



DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

CORES	A	B	C	D	E
RI 3.3 × 8 × 2.5	3.3 ± 0.1		2.5 ± 0.15	8.0 ± 0.3	
RI 4.5 × 2.2 × 3.6	4.5 ± 0.1		3.6 ^{+0.05} _{-0.1}	2.2 ± 0.1	
RI 4 × 9.85 × 3.1	4.0 ± 0.1		3.1 ± 0.1	9.85 ± 0.4	
RI 7.8 × 4 × 6.4	7.8 ± 0.3		6.4 ± 0.2	4.0 ± 0.2	
RI 12 × 13.5 × 9.6	12 ± 0.3		9.6 ± 0.15	13.5 ± 0.5	
RI 16 × 8 × 12	16 ± 0.2		12 ± 0.2	8.0 ± 0.3	
RI 8.8 × 6.5 × 6.07(S)	8.8 ± 0.2	7.0 ± 0.15	6.07 ± 0.15	6.5 ± 0.3	3.5 ± 0.2
RI 12.4 × 4.2 × 10.1(S)	12.4 ± 0.3	10.15 ^{+0.1} _{-0.2}	9.35 ^{+0.05} _{-0.1}	4.2 ± 0.2	2.0 ± 0.2

DRI 型磁芯 USE FOR ALARM (CORE DRI TYPE)

DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

Ordering code	DR	RI (combination with DR)
DRI 3.3 × 2T	DR 2.5 × 2	RI 3.3 × 2 × 2.5T
DRI 3.3 × 2.6T	DR 2.5 × 2.6	RI 3.3 × 2.6 × 2.5T
DRI 4.5 × 2T	DR 3.55 × 2	RI 4.5 × 2 × 3.6T
DRI 4.5 × 2.5T	DR 3.55 × 2.5	RI 4.5 × 2.5 × 3.6T
DRI 4.9 × 3T	DR 4 × 3 (3.85 × 3)	RI 4.9 × 3 × 3.9T
DRI 3.3 × 1.7T	DR 2.5 × 1.7	RI 3.3 × 1.7 × 2.5T
DRI 4.5 × 2.2T	DR 3.6 × 2.2	RI 4.5 × 2.2 × 3.6T
DRI 4.5 × 2.5T	DR 3.6 × 2.5	RI 4.5 × 2.5 × 3.6T

CONFIGURATIONS:

