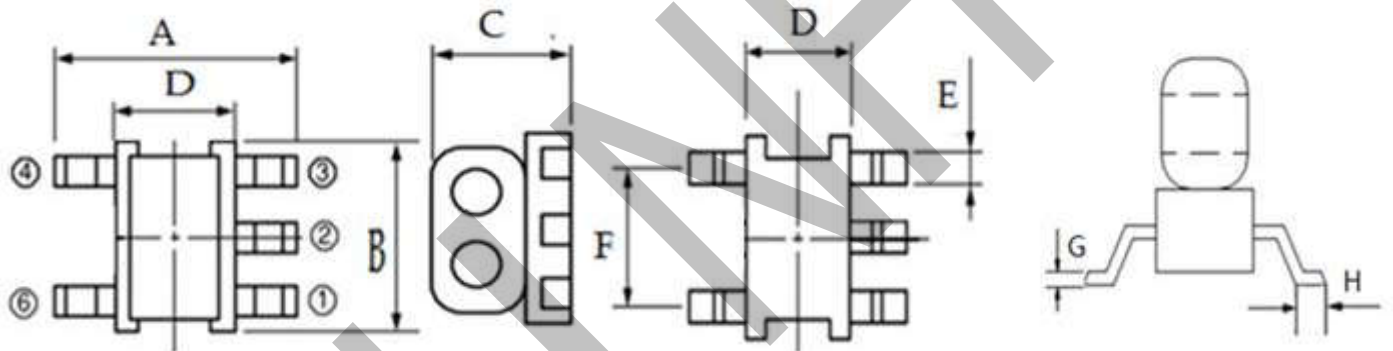


Features:



- ◆ Frequency Range: 5 to 1500 MHz
- ◆ Surface mount and available in tape and reel
- ◆ 260°C reflow compatible
- ◆ RoHS Compliant and Pb free
- ◆ Operating temperature range: -40°C to +85°C
- ◆ Storage temperature range: -55°C to +100°C

Applications:

- ◆ For catv
- ◆ For broadband and wireless communications

Dimension diagram (Unit:mm) :


A=4.10±0.20 B=3.80±0.20 C=3.20±0.20 D=2.80±0.20 E=0.55±0.05 F=2.54±0.05 G=0.25±0.05 H=0.60±0.05

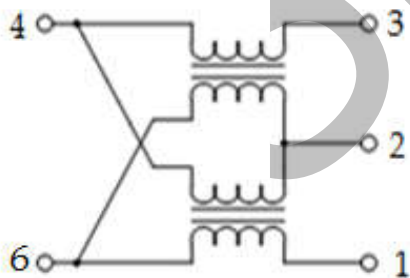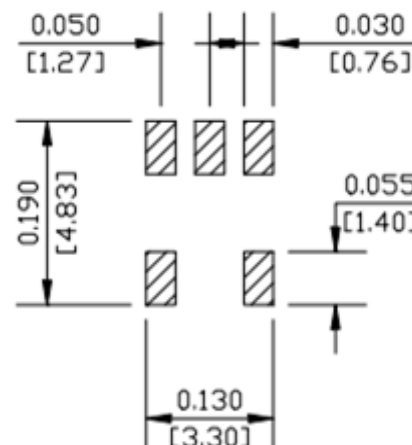Electrical structure:**Recommended layout(mm):**

Pin configuration

Pin no.	Function
1	Input
2	Ground
3	Coupled
4	Isolated
6	Output


Application circuit :

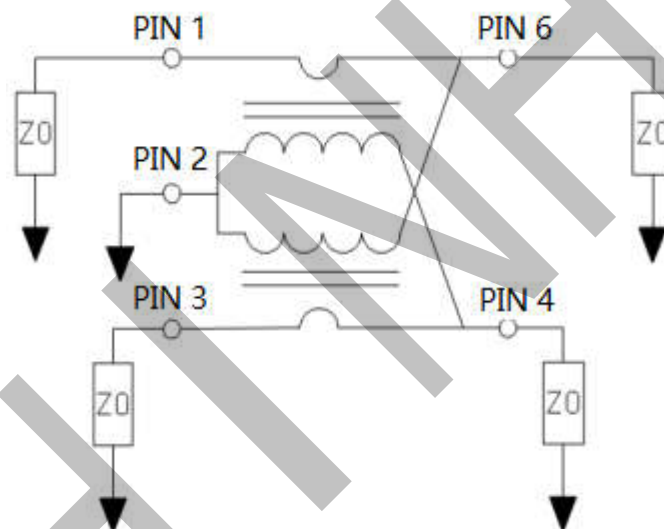


Electrical Specifications: $T_A = 25^\circ\text{C}$ $Z_0 = 75\Omega$

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss	5-1500MHz	dB	—	1.6	2.0
Coupling	5-1500MHz	dB	—	9.0	± 0.6
Input Return Loss	5-1500MHz	dB	16.0	25.0	—
Output Return Loss	5-1500MHz	dB	20.0	25.0	—
Coupling Return Loss	5-1500MHz	dB	16.0	20.0	—
Isolation	5-1500MHz	dB	18.0	22.0	—


Main line Loss(pin1-6):

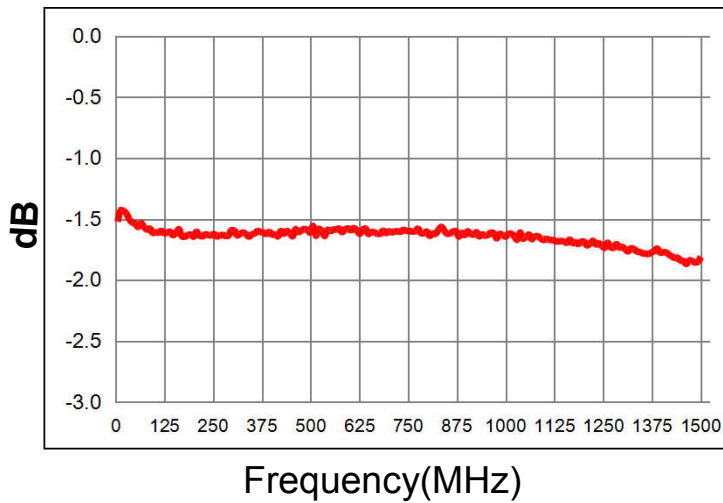


Coupling (pin1-3):

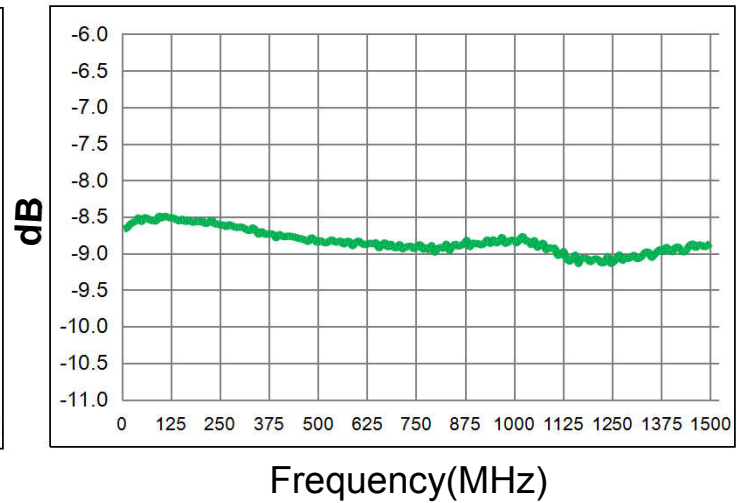


Input Return Loss (Pin1)

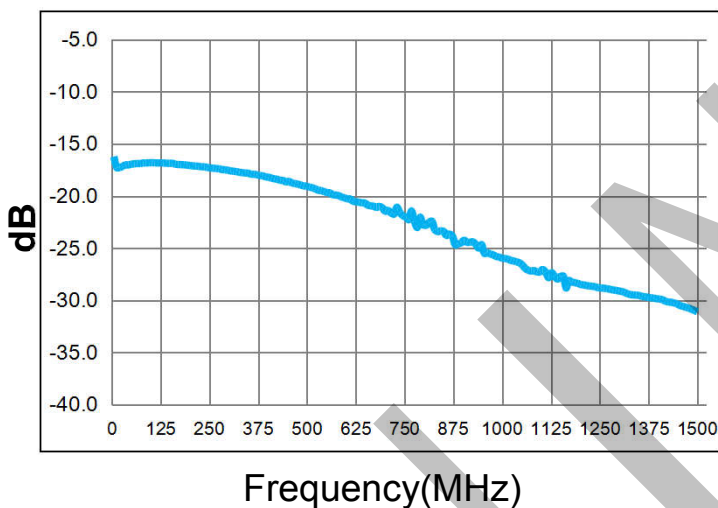


Output Return Loss (Pin6)

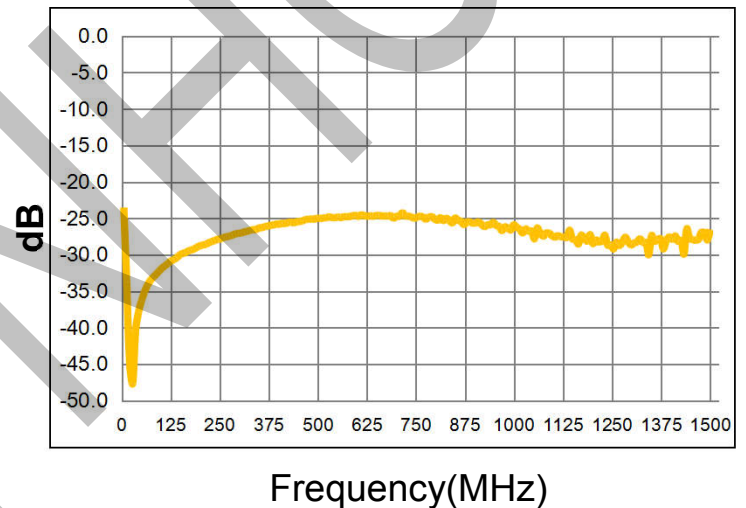

Coupling Return Loss (Pin3)

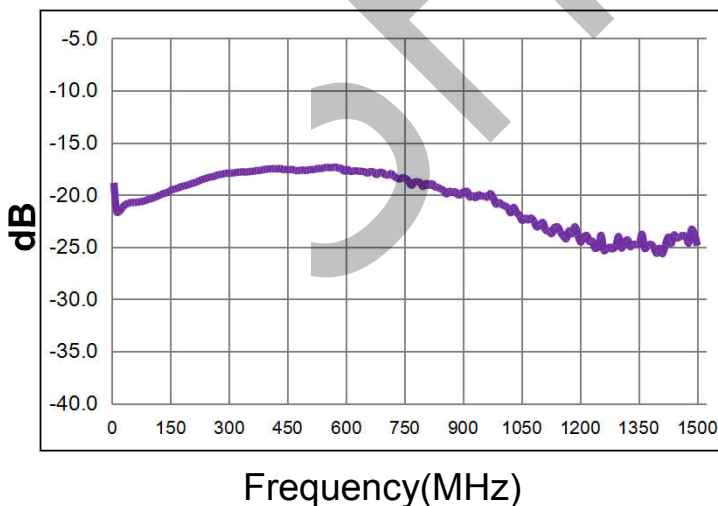


Isolation (Pin1-4)


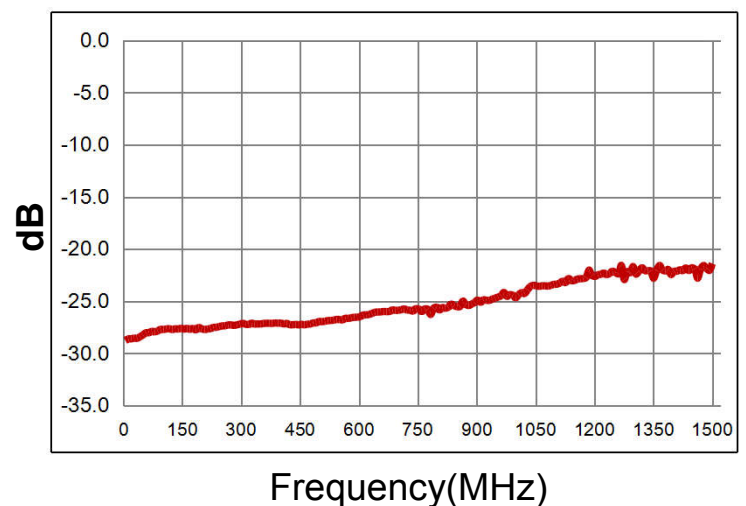


Recommended Soldering Temperature Graph:

建议迴焊条件
The condltion of reflow
(Recommendation)

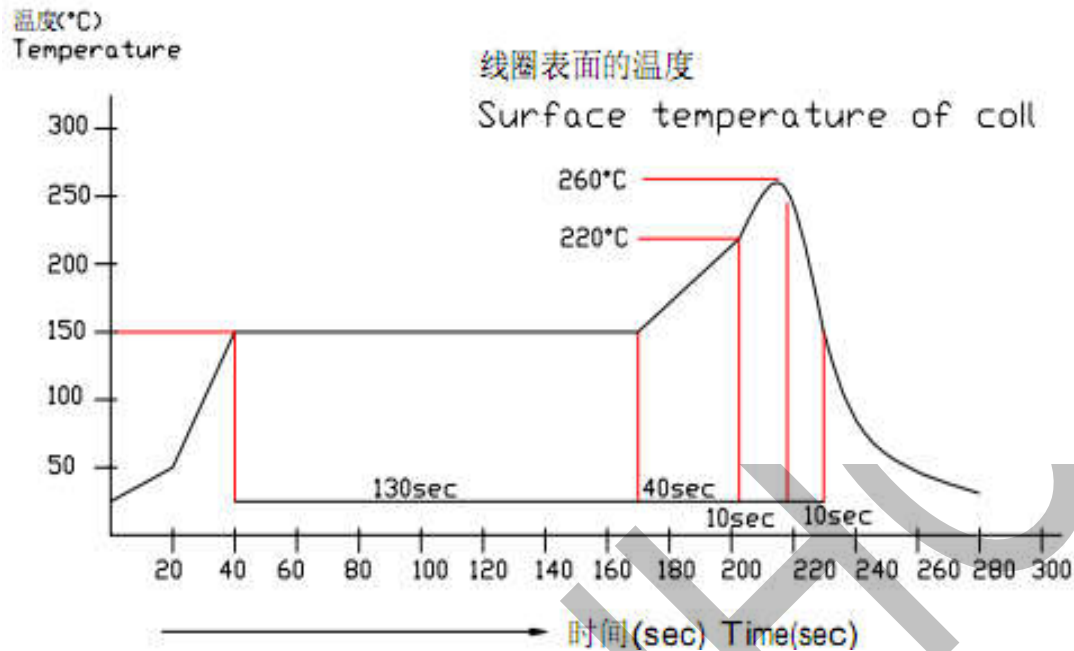

Packging Dimension For Caeier Tape(UNIT:mm):

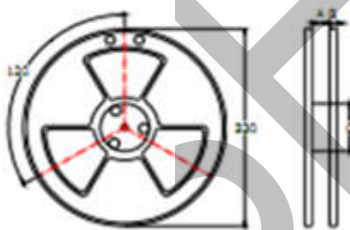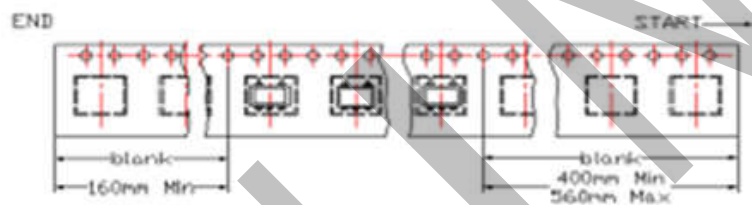

SPEC	8	12	16	24	32	44	56	72
DIM A±0.1	8.5	12.5	16.5	24.5	32.5	44.5	56.5	72.5
DIM B±0.1	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
DIM Ct±0.1	100	100	100	100	100	100	100	100

QUANTITY
2000PCS/Reel

15 reel/Big carton/60000pcs