Split Core Current Transformers

SCTK660A Series



SCTK660A series retro-fit (split-core) current transformer has been specially designed to facilitate their installation in new or already existing net works. They may be installed without opening any cable or bus-bar circuit. An internal precision resistor across the secondary winding of the CT provides a low safe voltage output. It can save time and the installation costs.


Features

- The structure of the self-locking, safe, easy to install, portable
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations


Applications

- Current measurement, monitoring and protection for electrical wiring and equipment.
- Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation – control system.
- Current, power and energy monitoring device.


Circuit connection diagram



Designation

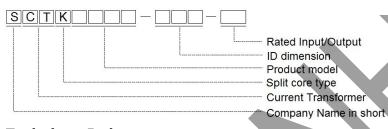



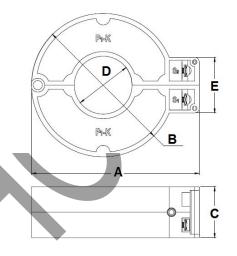

Technique Index

Electrical Param	neter
Frequency	50-2.5KHz
Rated Input	0.5A-630A
Measuring range	10%ln-130%ln
Rated Output	0.333V(AC) or 0-5A
Ratio	≤± 0.2%
Phase angle	≤ ±30min
Dielectric strength	5.0KV/1mA/1min
Insulation Resistance	DC500V/100MΩ min

Mechanical Parameter				
Case	ABS/UL94-V0			
Bobbin	PBT			
Core	Permalloy			
Internal structure	Ероху			
Construction	Tie			
Operating Temp	−25°C∼+75°C			
Operating Humidity	≤85%			
Output Connection	Terminal or UL1015 22AWG Wire 1.5m			

Type Selection

P/N	Rated Input (A)	Output (mA/V)	Accuracy	Dimensions(mm)				
				Α	В	С	D	Е
SCTK660A-010	0.5-100A	0-50mA	0.2、0.5、1.0	50.0	40.0	22.5	10.0	24.0
3C1K000A-010	(1、5、10、30、50、100)	0.333V						
SCTK660A-016	1-250A	0-100mA/1A	0.2、0.5、1.0	61.0	50.0	22.5	16.0	24.0
	(10、50、75、100、200、250)	0.333V						
SCTK660A-025	5-400A	0-200mA/1A/5A	0.2、0.5、1.0	74.0	62.0	22.5	25.0	24.0
	(10、50、100、200、250、400)	0.333V						
SCTK660A-032 (10、50	5-630A	0-200mA/1A/5A	0.2、0.5、1.0	81.5	70.0	22.5	32.0	24.0
	(10、50、100、200、250、630)	0.333V						

ShaanXi Shinhom Enterprise Co.,Ltd

Web: Http://www.shinhom.com Mail: sales@shinhom.com.cn