


ADSL CENTRAL OFFICE POTS SPLITTER

ADSL-205,213 SERIES



FEATURES:

- Excellent Longitudinal Balance
- DC Current up to 100mA

OPTIONS:

- Bulk Packaging is Standard
- Custom design available
- SMT Available

COMMON APPLICATIONS:

- ADSL Central Office
- POTS Filter

STANDARD SPECIFICATIONS

Part Number	Turns Ratio	OCL (mH)	DCR (Ω Max)	Schematic	Package
ADSL-205	1CT:1	$4.0 \pm 5\%$	3.00	1	A
ADSL-206	1CT:1	$3.0 \pm 5\%$	2.50	1	A
ADSL-207	1CT:1	$2.25 \pm 10\%$	2.25	1	A
ADSL-208	1CT:1	$1.425 \pm 10\%$	2.25	1	A
ADSL-209	1CT:1	$1.65 \pm 10\%$	2.25	1	A
ADSL-210	1CT:1	$1.35 \pm 10\%$	2.25	1	A
ADSL-211	1:1	$4.0 \pm 5\%$	3.00	2	B
ADSL-212	1:1	$10.0 \pm 5\%$	5.00	2	B
ADSL-213	1:1:1:1	$0.6 \pm 5\%$	2.00	3	B

Note: 1. K = $\pm 10\%$, M = $\pm 20\%$



TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS

- Soldering methods: Wave, Reflow
- Operating Temperature: 0°C to 70°C
- Storage Temperature: -55°C to 125°C


Note: All specifications subject to change without notice.

Hipot: 1500VRMS.
Inductance Measured at 1KHz, 100mA



Schematic1

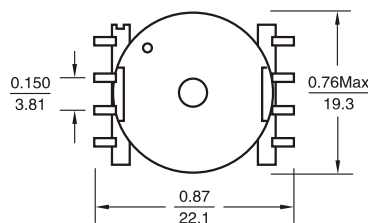


Package A




Schematic2

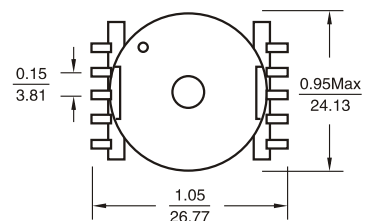

Package B



Schematic3



Dimensions: Inches (mm)